

HEP

LED DRIVER 2023





WHO WE ARE

Since 2002 HEP Group has been specializing in the innovation and manufacture of environment-friendly, energy-saving, delicate electronic lighting control gear for industrial and commercial purposes.

With around 500 employees HEP Group serves customers in more than 50 countries worldwide. The head office HEP Tech Co., Ltd. in Taiwan is responsible for sales to non-European countries and houses one of the Group's R&D centers. HEP Tech. Co., Ltd is a TPEX listed company (stock code 3609).

To European customers HEP GmbH in Germany provides optimal service and timely delivery from their warehouse. HEP GmbH's engineering department is the main development and certification center. Together with the affiliated R&D center of HEP Tech. Co. Ltd. it is best equipped to perform innovative and advanced developments, measurements and employ the highest technical know-how to ensure utmost quality.

All of HEP products are engineered in compliance with the highest safety and performance standards, evidenced by certifications from global testing centers such as



and also comply with global regulatory safety and environment protection norms, such as RoHS, REACH and WEEE. Our production site in Zhuhai (China) is certified according to ISO9001, ISO14001 and OHSAS18001.

In pursuit of corporate social responsibility - the ultimate energy efficiency, lighting quality and sustainable environment, HEP is constantly dedicated to developing the most advanced green lighting electronics. Modern dimming technologies, wireless solutions and IoT technologies meet the high requirements of the corporate goals. HEP never ceases to maximize lighting performance excelling in innovation and continuously supporting a greener world.

HEP—High-reliability Electronic Performance is our commitment to customers with value-added quality and services. As a strategic partner, we not only promise to meet our customer's special requirements, but also look forward to remaining a source of innovation.

Approval, Safety and Markings



The European conformity mark ENEC (European Norms Electrical Certification) declares that product complies with all requirements of the ENEC agenda. *



International conformity marks.
The device complies with all requirements of the agenda. *



Product complies with EU requirements. *



Digitally controllable device complies to all requirements of the DiiA where HEP maintains a membership.



DALI standard for intelligent, IoT-ready luminaires.



Dimming and switching on/off by push button.



0/1 - 10 V dimmable.



Trailing edge dimmable.



Output current adjustable via DIP-SWITCH.



Output current adjustable via Near-Field Communication.



Safety class II device bears additional safety features like double or reinforced isolation.



Double or reinforced insulation. Ready for safety class II equipment.



Independent device which does not have to be mounted inside a luminaire.



Short-circuit-proof safety electronic control gear.



Thermally protected device. Shows max. surface temp. in the event of a fault at rated ambient temperature.



Can be installed on and in furniture made from materials with unknown flammability properties.

SELV

Safety Extra Low Voltage.

IP20 IP44 IP67

Type of protection against ingress and water.



Product complies with all RoHS (Restriction of the use of certain Hazardous Substances in electrical and electronic equipment) requirements.



Product must be sent to separate collection facilities for recovery and recycling.



CONTENT TABLE

HEP LED PRODUCT RANGE 2023

1

TRACKLIGHT

2

DIMMABLE CONSTANT CURRENT

3

NON-DIMMABLE CONSTANT CURRENT

4

DIMMABLE CONSTANT VOLTAGE

5

NON-DIMMABLE CONSTANT VOLTAGE

6

ALPHABETIC REGISTER



01

TRACKLIGHT

IN-TRACK ADAPTOR

LV-DC LED DRIVER 48 V

IN-TRACK ADAPTOR

CASAMBI

CASAMBI dimmable | Current adjust via NFC

220–240 V

230.5 x 31 x 45.9 mm



Model	Irated	Prated	Urange	PF	Ripple	Certification
LWCBC25W600NLR	120-600mA	3–25.2 W	10–54 V	0.4C-0.95	±5 %	



220–240 V

230.5 x 31 x 45.9 mm



Model	Irated	Prated	Urange	PF	Ripple	Certification
LWCBC40W1050NLR	350-1050 mA	3.5–40 W	10–54 V	0.45C-0.9	±5 %	



For information about
Applications and
Accessories please see page 30

HEPxNFC




IN-TRACK ADAPTOR

HEPxNFC




□ DALI-2 DT8 for Tunable White | Current adjust via NFC

220–240 V 255 x 31 x 45.9 mm 

Model	I _{rated}	P _{rated}	U _{range}	PF	Ripple	Certification
LWDC25W700NLR-T2CH	200–700 mA	2–25 W	10–50 V	0.95	±5 %	ENEC
LWDC36W1000NLR-T2CH	350–1000 mA	3.5–36 W	10–50 V	0.95	±5 %	ENEC




□ DALI-2 DT6 | Current adjust via NFC

220–240 V 255 x 31 x 45.9 mm 

Model	I _{rated}	P _{rated}	U _{range}	PF	Ripple	Certification
LWDC25W600NLR	120–600 mA	1.8–25.2 W	10–54 V	0.9 C	±5 %	ENEC
LWDC40W1050NLR	350–1050 mA	3.5–40 W	10–54 V	0.95	±5 %	ENEC




□ Trailing Edge dimmable | Current adjust via DIP SWITCH

220–240 V 230.5 x 31 x 45.9 mm 

Model	I _{rated}	P _{rated}	U _{range}	PF	Ripple	Certification
LWTC20W500CALR	250 mA	6.3–10 W	25–40 V	0.9 C	±5 %	ENEC
	350 mA	8.8–14 W	25–40 V	0.9 C	±5 %	ENEC
	500 mA	12.5–20 W	25–40 V	0.9 C	±5 %	ENEC
LWTC32W800CALR	600 mA	15–24 W	25–40 V	0.9 C	±5 %	ENEC
	700 mA	17.5–28 W	25–40 V	0.9 C	±5 %	ENEC
	800 mA	20–32 W	25–40 V	0.9 C	±5 %	ENEC



□ Non-dimmable | Current adjust via DIP SWITCH



220–240 V 230.5 x 31 x 45.9 mm 

Model	I _{rated}	P _{rated}	U _{range}	PF	Ripple	Certification
LWC40W1000CALR	700 mA	17.5–28 W	25–40 V	0.96	±5 %	
	800 mA	20–32 W	25–40 V	0.96	±5 %	
	900 mA	22.5–36 W	25–40 V	0.96	±5 %	
	1000 mA	25–40 W	25–40 V	0.96	±5 %	
LWC40W1050CALR	700 mA	17.5–26.6 W	25–38 V	0.96	±5 %	
	800 mA	20–30.4 W	25–38 V	0.96	±5 %	
	950 mA	23.8–36.1 W	25–38 V	0.96	±5 %	
	1050 mA	26.3–39.9 W	25–38 V	0.96	±5 %	





LV-DC LED DRIVER 48 V

□ DALI-2 DT8 for tunable white | Current adjust via DIP-SWITCH



48 V	125 x 14.5 x 10 mm			 
Model	Irated	Prated	Urange	Efficiency
G5DDC10W250CA-T	100 mA	0.3–4 W	3–40 V	> 90 %
	150 mA	0.45–6 W		
	200 mA	0.6–8 W		
	250 mA	0.75–10 W		





□ DALI-2 DT6 | Current adjust via DIP-SWITCH

48 V	125 x 14.5 x 10.2 mm			 
Model	Irated	Prated	Urange	Efficiency
G5DDC10W250CA	100 mA	0.3–4 W	3–40 V	> 85 %
	150 mA	0.45–6 W		
	200 mA	0.6–8 W		
	250 mA	0.75–10 W		




48 V	125 x 14.5 x 10.7 mm			 
Model	Irated	Prated	Urange	Efficiency
G5DDC30W700CA	350 mA	1.1–14 W	3–40 V	> 91 %
	500 mA	1.5–20 W		
	600 mA	1.8–24 W		
	700 mA	2.1–28 W		



48 V	70 x 14.5 x 10.8 mm			 
Model	Irated	Prated	Urange	Efficiency
G5DC40W1000CA	350 mA	1.1–14 W	3–40 V	> 92%
	480 mA	1.5–19.2 W		
	580 mA	1.8–23.2 W		
	680 mA	2.1–27.2 W		
	700 mA	2.1–28 W		
	800 mA	2.4–32 W		
	900 mA	2.7–36 W		
	1000 mA	3–40 W		







02

Constant Current
DIMMABLE



DALI PROFESSIONAL

DALI DIM

CASAMBI

TUNABLE WHITE

TRAILING EDGE DIM

ZIGBEE

MULTI-DIM

0/1-10 V DIM



DALI PROFESSIONAL

HEPxNFC



□ DALI-2 | Available Versions: D4i

220-240 V 180 x 45 x 27 mm



Model	Irated	Prated	Urange	PF	Ripple	Certification
LEDC30W1050NLRZ	150-350 mA	2.3-18.9 W	15-54 V	0.95	±5 %	ENEC
	350-1050 mA	3.5-30 W	10-54 V			



220-240 V 220 x 70 x 30 mm



Model	Irated	Prated	Urange	PF	Ripple	Certification
LEDC45W1050NLRZ-x	350-1050 mA	3.5-45 W	10-54 V	0.98	±5 %	ENEC

x for blank (DALI-2), -D4i (D4i)



220-240 V 220 x 70 x 30 mm



Model	Irated	Prated	Urange	PF	Ripple	Certification
LEDC60W1750NLRZ-x	900-1750 mA	18-60 W	20-50 V	0.98	±5 %	ENEC

x for blank (DALI-2), -D4i (D4i)



□ DALI-2


120-277 V 103.5 (123) x 79 x 30 mm



Model	Irated	Prated	Urange	PF	Ripple	Certification
LTDC50W1500NLRP UNI	500-1500 mA	10-50 W	15-50 V	0.95	±2.5 %	ENEC / cRUs



Easily transformed into independent models

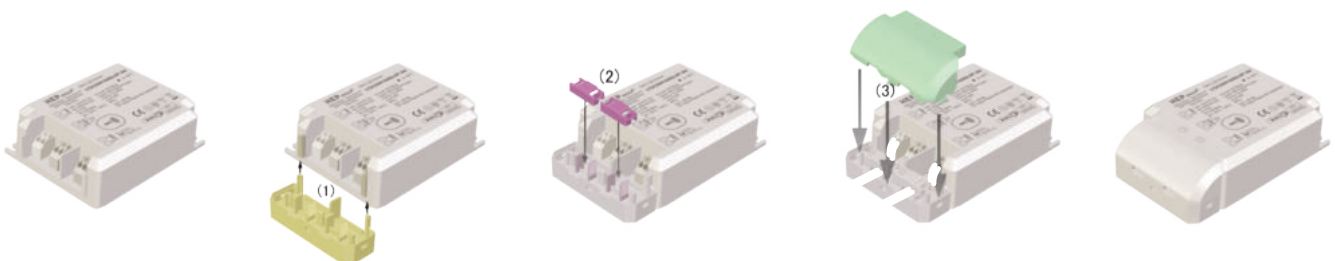

TUNABLE WHITE

HEPxNFC



□ DALI-2 DT8 for tunable white | Independent

220-240 V	123 x 79 x 24 mm						
Model	Irated	Prated	Urangle	PF	Ripple	Certification	
LTDC25W700NZ-T2CH	200-700 mA	5-25 W	10-60 Vdc	0.9 C	±5 %	ENEC	



220-240 V	201.6 x 58 x 30 mm						
Model	Irated	Prated	Urangle	PF	Ripple	Certification	
LTDC45W1050NZ-T2CH	350-1050 mA	7-45 W	20-50 Vdc	0.9 C	±5 %	ENEC	



□ DALI-2 DT8 for tunable white | Built-in

220-240 V	360 x 30.4 x 21.5						
Model	Irated	Prated	Urangle	PF	Ripple	Certification	
LADC45W1050N-T2CH	350-1050 mA	7-45 W	20-50 V	0.9 C	±5 %	ENEC	



220-240 V	80 x 55 x 32 mm						
Model	Irated	Prated	Urangle	PF	Ripple	Certification	
LNDC15W700NLRP-T2CH	125-700 mA	1.9-15 W	15-54 V	0.9 C	±5 %	ENEC	



MULTI-DIM

□ DALI-2, Push-dim, 1-10 V | Current adjust via DIP SWITCH

220–240 V 150 x 52 x 28 mm



Model	Irated	Prated	Urangle	PF	Ripple	Certification
LLD20W700CA	250 mA	2.3–15 W	9–60 V	0.9 C	±7 %	ENEC
	350 mA	3.2–20.5 W	9–58 V	0.9 C	±7 %	ENEC
	500 mA	4.5–21 W	9–42 V	0.9 C	±7 %	ENEC
	700 mA	6.3–21 W	9–30 V	0.9 C	±7 %	ENEC



220–240 V 103 x 67 x 22 mm



Model	Irated	Prated	Urangle	PF	Ripple	Certification
LLD30W900CA	300 mA	2.7–17.4 W	9–58 V	0.9 C	±7 %	ENEC
	350 mA	3.2–20.3 W	9–58 V	0.9 C	±7 %	ENEC
	400 mA	3.6–23.2 W	9–58 V	0.9 C	±7 %	ENEC
	450 mA	4.1–26.1 W	9–58 V	0.9 C	±7 %	ENEC
	500 mA	4.5–29 W	9–58 V	0.9 C	±7 %	ENEC
	550 mA	5–30 W	9–55 V	0.9 C	±7 %	ENEC
	600 mA	5.4–30 W	9–50 V	0.9 C	±7 %	ENEC
	650 mA	5.9–30 W	9–46 V	0.9 C	±7 %	ENEC
	700 mA	6.3–30 W	9–42 V	0.9 C	±7 %	ENEC
	750 mA	6.8–30 W	9–40 V	0.9 C	±7 %	ENEC
	800 mA	7.2–30 W	9–38 V	0.9 C	±7 %	ENEC
	850 mA	7.7–30 W	9–35 V	0.9 C	±7 %	ENEC
	900 mA	8.1–30 W	9–34 V	0.9 C	±7 %	ENEC



220–240 V 123 x 79 x 24 mm



Model	Irated	Prated	Urangle	PF	Ripple	Certification
LLD40W1050CA	700 mA	6.3–40 W	9–58 V	0.9 C	±7 %	ENEC
	750 mA	6.8–40 W	9–53 V	0.9 C	±7 %	ENEC
	800 mA	7.2–40 W	9–50 V	0.9 C	±7 %	ENEC
	850 mA	7.7–40 W	9–47 V	0.9 C	±7 %	ENEC
	900 mA	8.1–40 W	9–45 V	0.9 C	±7 %	ENEC
	950 mA	8.6–40 W	9–42 V	0.9 C	±7 %	ENEC
	1000 mA	9–40 W	9–40 V	0.9 C	±7 %	ENEC
	1050 mA	9.5–40 W	9–38 V	0.9 C	±7 %	ENEC



220–240 V 123 x 79 x 24 mm



Model	Irated	Prated	Urangle	PF	Ripple	Certification
LLD50W1400CA	700 mA	6.3–40.6 W	9–58 V	0.9 C	±7 %	ENEC
	800 mA	7.2–46.4 W	9–58 V	0.9 C	±7 %	ENEC
	900 mA	8.1–50 W	9–56 V	0.9 C	±7 %	ENEC
	1050 mA	9.5–50 W	9–48 V	0.9 C	±7 %	ENEC
	1200 mA	10.8–50 W	9–41 V	0.9 C	±7 %	ENEC
	1300 mA	11.7–50 W	9–38 V	0.9 C	±7 %	ENEC
	1400 mA	12.6–50 W	9–36 V	0.9 C	±7 %	ENEC



220–240 V 201.6 x 58 x 30 mm



Model	Irated	Prated	Urangle	PF	Ripple	Certification
LLD60W1750CA	900 mA	8.1–52.2 W	9–58 V	0.9 C	±7 %	ENEC
	1050 mA	9.5–60 W	9–58 V	0.9 C	±7 %	ENEC
	1200 mA	10.8–60 W	9–50 V	0.9 C	±7 %	ENEC
	1400 mA	12.6–60 W	9–43 V	0.9 C	±7 %	ENEC
	1750 mA	15.8–60 W	9–34 V	0.9 C	±7 %	ENEC



DALI-2 DIMMABLE

□ Independent with terminals

220–240 V

87,5 x 51,8 x 25 mm



Model	Irated	Prated	Urange	PF	Ripple	Certification
LLDC12W700CALR-Z	350 mA	1,1–8,4 W	3–24 V	0,4-0,92C	±5 %	ENEC
	500 mA	1,5–12 W	3–24 V			
	550 mA	1,7–12,1 W	3–22 V			
	700 mA	2,1–19,9 W	3–17 V			



DALI-2 DIMMABLE

□ Square shape built-in with leads out


220–240 V 69.3 x 43.5 x 24.6 mm



Model	Irated	Prated	Urange	PF	Ripple	Certification
LNDC6W120LRP	120 mA	1.8–3.6 W	15–30 V	0.85 C	±6 %	ENEC
LNDC6W150LRP	150 mA	2.3–4.5 W	15–30 V	0.85 C	±6 %	ENEC
LNDC6W200LLRP	200 mA	2.4–4 W	12–20 V	0.75 C	±6 %	ENEC
LNDC6W200LRP	200 mA	3–6 W	15–30 V	0.85 C	±6 %	ENEC
LNDC6W250LRP	250 mA	3.3–4.7 W	13–19 V	0.85 C	±6 %	ENEC
LNDC6W250HLRP	250 mA	3–5 W	12–20 V	0.80 C	±6 %	ENEC
LNDC6W300LRP	300 mA	3.9–5.7 W	13–19 V	0.85 C	±6 %	ENEC
LNDC6W300HLRP	300 mA	3.6–6 W	12–20 V	0.85 C	±6 %	ENEC
LNDC6W350LLRP	350 mA	3–4.4 W	8.5–12.5 V	0.75 C	±6 %	ENEC
LNDC6W350LRP	350 mA	4.6–6.6 W	13–19 V	0.85 C	±6 %	ENEC




220–240 V 69.3 x 43.5 x 24.6 mm



Model	Irated	Prated	Urange	PF	Ripple	Certification
LNDC10W120HLRP	120 mA	3.6–5 W	30–42 V	0.85 C	±6 %	ENEC
LNDC10W150HLRP	150 mA	4.5–6.3 W	30–42 V	0.85 C	±6 %	ENEC
LNDC10W200LRP	200 mA	4–5.8 W	20–29 V	0.9 C	±6 %	ENEC
LNDC10W200HLRP	200 mA	6–8.4 W	30–42 V	0.85 C	±6 %	ENEC
LNDC10W250HLRP	250 mA	7–10 W	28–40 V	0.9 C	±6 %	ENEC
LNDC10W300LRP	300 mA	6–8.7 W	20–29 V	0.9 C	±6 %	ENEC
LNDC10W350LLRP	350 mA	4.6–7.3 W	13–21 V	0.85 C	±6 %	ENEC
LNDC10W350LRP	350 mA	7–10.1 W	20–29 V	0.9 C	±6 %	ENEC
LNDC10W400LRP	400 mA	5.6–8 W	14–20 V	0.9 C	±6 %	ENEC
LNDC10W450LRP	450 mA	6.3–9 W	14–20 V	0.9 C	±6 %	ENEC
LNDC10W500LRP	500 mA	7–10 W	14–20 V	0.9 C	±6 %	ENEC



220–240 V 88 x 45 x 25 mm



Model	Irated	Prated	Urange	PF	Ripple	Certification
LNDC15W180LRP	180 mA	5.4–7.7 W	30–43 V	0.9 C	±5 %	ENEC
LNDC15W200LRP	200 mA	6–8.6 W	30–43 V	0.9 C	±5 %	ENEC
LNDC15W250LRP	250 mA	7.5–10.7 W	30–43 V	0.9 C	±5 %	ENEC
LNDC15W300LRP	300 mA	9–12.9 W	30–43 V	0.9 C	±5 %	ENEC
LNDC15W350LRP	350 mA	10.5–15 W	30–43 V	0.9 C	±5 %	ENEC



220–240 V 88 x 45 x 25 mm



Model	Irated	Prated	Urange	PF	Ripple	Certification
LNDC20W200LRP	200 mA	8–11.6 W	40–58 V	0.9 C	±5 %	ENEC
LNDC20W300LRP	300 mA	12–17.4 W	40–58 V	0.9 C	±5 %	ENEC
LNDC20W350LRP	350 mA	14–20.3 W	40–58 V	0.9 C	±5 %	ENEC
LNDC20W400LRP	400 mA	11.2–16 W	28–40 V	0.9 C	±5 %	ENEC
LNDC20W450LRP	450 mA	12.6–18 W	28–40 V	0.9 C	±5 %	ENEC
LNDC20W500LRP	500 mA	14–20 W	28–40 V	0.9 C	±5 %	ENEC
LNDC20W550LRP	550 mA	11–15.9 W	20–29 V	0.9 C	±5 %	ENEC
LNDC20W600LRP	600 mA	12–17.4 W	20–29 V	0.9 C	±5 %	ENEC
LNDC20W700LRP	700 mA	14–20.3 W	20–29 V	0.9 C	±5 %	ENEC



220–240 V 96 x 55 x 32 mm



Model	Irated	Prated	Urange	PF	Ripple	Certification
LNDC30W400LRP	400 mA	14.4–21.6 W	36–54 V	0.9 C	±5 %	ENEC
LNDC30W450LRP	450 mA	16.2–24.3 W	36–54 V	0.9 C	±5 %	ENEC
LNDC30W500LRP	500 mA	18–27 W	36–54 V	0.9 C	±5 %	ENEC
LNDC30W550LRP	550 mA	16.5–23.1 W	30–42 V	0.9 C	±5 %	ENEC
LNDC30W600LRP	600 mA	18–25.2 W	30–42 V	0.9 C	±5 %	ENEC
LNDC30W700LRP	700 mA	21–29.4 W	30–42 V	0.9 C	±5 %	ENEC
LNDC30W800LRP	800 mA	16.8–24 W	21–30 V	0.9 C	±5 %	ENEC
LNDC30W900LRP	900 mA	18.9–27 W	21–30 V	0.9 C	±5 %	ENEC
LNDC30W1000LRP	1000 mA	21–30 W	21–30 V	0.9 C	±5 %	ENEC



DALI-2 DIMMABLE

220–240 V

96 x 55 x 32 mm



Model	Irated	Prated	Urangle	PF	Ripple	Certification
LNDC40W500LRP	500 mA	20–28.5 W	40–57 V	0.9 C	±5 %	ENEC
LNDC40W600LRP	600 mA	24–34.2 W	40–57 V	0.9 C	±5 %	ENEC
LNDC40W700LRP	700 mA	28–39.9 W	40–57 V	0.9 C	±5 %	ENEC
LNDC40W800LRP	800 mA	24–35.2 W	30–44 V	0.9 C	±5 %	ENEC
LNDC40W850LRP	850 mA	25.5–37.4 W	30–44 V	0.9 C	±5 %	ENEC
LNDC40W900LRP	900 mA	27–39.6 W	30–44 V	0.9 C	±5 %	ENEC
LNDC40W950LRP	950 mA	25.7–36.1 W	27–38 V	0.9 C	±5 %	ENEC
LNDC40W1000LRP	1000 mA	27–38 W	27–38 V	0.9 C	±5 %	ENEC
LNDC40W1050LRP	1050 mA	28.4–39.9 W	27–38 V	0.9 C	±5 %	ENEC



TRAILING EDGE DIMMABLE

□ Square shape built-in with leads out

220–240 V 63.3 x 40 x 23 mm 

Model	Irated	Prated	Urangle	PF	Ripple	Certification
LNTC6W120LR	120 mA	2.2–3.6 W	18–30 V	0.9 C	±5 %	ENEC
LNTC6W150LR	150 mA	2.5–4.5 W	16.5–30 V	0.9 C	±5 %	ENEC
LNTC6W200LR	200 mA	3.3–6 W	16.5–30 V	0.9 C	±5 %	ENEC
LNTC6W250LR	250 mA	2.5–4.2 W	10–17 V	0.9 C	±5 %	ENEC
LNTC6W300LR	300 mA	3–5.1 W	10–17 V	0.9 C	±5 %	ENEC
LNTC6W350LR	350 mA	3.5–5.9 W	10–17 V	0.9 C	±5 %	ENEC
LNTC6W400LR	400 mA	2.8–5.2 W	7–13 V	0.9 C	±5 %	ENEC
LNTC6W450LR	450 mA	3.2–5.8 W	7–13 V	0.9 C	±5 %	ENEC
LNTC6W500LR	500 mA	3.5–6.5 W	7–13 V	0.9 C	±5 %	ENEC
LNTC6W700LR	700 mA	3.4–6 W	4.8–8.6 V	0.9 C	±5 %	ENEC



220–240 V 69.3 x 43.5 x 24.6 mm 

Model	Irated	Prated	Urangle	PF	Ripple	Certification
LNTC10W200LR	200 mA	3.2–5.8 W	16–29 V	0.9 C	±5 %	ENEC
LNTC10W200HLR	200 mA	6–8.4 W	30–42 V	0.9 C	±5 %	
LNTC10W300LR	300 mA	4.8–8.7 W	16–29 V	0.9 C	±5 %	ENEC
LNTC10W350LLR	350 mA	4.5–9.1 W	13–26 V	0.9 C	±5 %	
LNTC10W350LR	350 mA	5.6–10.1 W	16–29 V	0.9 C	±5 %	ENEC
LNTC10W400LR	400 mA	4.4–8 W	11–20 V	0.9 C	±5 %	ENEC
LNTC10W450LR	450 mA	5–9 W	11–20 V	0.9 C	±5 %	ENEC
LNTC10W500LR	500 mA	5.5–10 W	11–20 V	0.9 C	±5 %	ENEC
LNTC10W550LR	550 mA	4.4–7.7 W	8–14 V	0.9 C	±5 %	ENEC
LNTC10W700LR	700 mA	5.6–9.8 W	8–14 V	0.9 C	±5 %	ENEC



220–240 V 78 x 43.5 x 26 mm 

Model	Irated	Prated	Urangle	PF	Ripple	Certification
LNTC15W200LR	200 mA	6–8 W	30–40 V	0.9 C	±5 %	ENEC
LNTC15W250LR	250 mA	7.5–10 W	30–40 V	0.9 C	±5 %	ENEC
LNTC15W300LR	300 mA	9–12 W	30–40 V	0.9 C	±5 %	ENEC
LNTC15W350LR	350 mA	10.5–14 W	30–40 V	0.9 C	±5 %	ENEC



220–240 V 78 x 43.5 x 26 mm 

Model	Irated	Prated	Urangle	PF	Ripple	Certification
LNTC20W250LRP	250 mA	8.5–14.2 W	34–57 V	0.9 C	±5 %	ENEC
LNTC20W300LRP	300 mA	10.2–17.1 W	34–57 V	0.9 C	±5 %	ENEC
LNTC20W350LRP	350 mA	11.9–19.9 W	34–57 V	0.9 C	±5 %	ENEC
LNTC20W400LRP	400 mA	8.8–16.4 W	22–41 V	0.9 C	±5 %	ENEC
LNTC20W450LRP	450 mA	9.9–18.4 W	22–41 V	0.9 C	±5 %	ENEC
LNTC20W500LRP	500 mA	11–20.5 W	22–41 V	0.9 C	±5 %	ENEC
LNTC20W600LRP	600 mA	10.2–17.4 W	17–29 V	0.9 C	±5 %	ENEC
LNTC20W700LRP	700 mA	11.9–20.3 W	17–29 V	0.9 C	±5 %	ENEC



220–240 V 89 x 45 x 32 mm 

Model	Irated	Prated	Urangle	PF	Ripple	Certification
LNTC30W400LRP	400 mA	14.4–24 W	36–60 V	0.9 C	±5 %	ENEC
LNTC30W450LRP	450 mA	16.2–27 W	36–60 V	0.9 C	±5 %	ENEC
LNTC30W500LRP	500 mA	18–30 W	36–60 V	0.9 C	±5 %	ENEC
LNTC30W550LRP	550 mA	13.8–23.1 W	25–42 V	0.9 C	±5 %	ENEC
LNTC30W600LRP	600 mA	15–25.2 W	25–42 V	0.9 C	±5 %	ENEC
LNTC30W700LRP	700 mA	17.5–29.4 W	25–42 V	0.9 C	±5 %	ENEC
LNTC30W800LRP	800 mA	14.4–24 W	18–30 V	0.9 C	±5 %	ENEC
LNTC30W900LRP	900 mA	16.2–27 W	18–30 V	0.9 C	±5 %	ENEC
LNTC30W1000LRP	1000 mA	18–30 W	18–30 V	0.9 C	±5 %	ENEC



TRAILING EDGE DIMMABLE

220–240 V

96 x 55 x 32 mm



Model	Irated	Prated	Urangle	PF	Ripple	Certification
LNTC40W500LRP	500 mA	17.5–28.5 W	35–57 Vdc	0.9 C	±5 %	ENEC
LNTC40W600LRP	600 mA	21–34.2 W	35–57 Vdc	0.9 C	±5 %	ENEC
LNTC40W700LRP	700 mA	24.5–39.9 W	35–57 Vdc	0.9 C	±5 %	ENEC
LNTC40W800LRP	800 mA	20.8–35.2 W	26–44 Vdc	0.9 C	±5 %	ENEC
LNTC40W850LRP	850 mA	22.1–37.4 W	26–44 Vdc	0.9 C	±5 %	ENEC
LNTC40W900LRP	900 mA	23.4–39.6 W	26–44 Vdc	0.9 C	±5 %	ENEC
LNTC40W950LRP	950 mA	20.9–36.1 W	22–38 Vdc	0.9 C	±5 %	ENEC
LNTC40W1000LRP	1000 mA	22–38 W	22–38 Vdc	0.9 C	±5 %	ENEC
LNTC40W1050LRP	1050 mA	23.1–39.9 W	22–38 Vdc	0.9 C	±5 %	ENEC



Mini built-in with leads out

220–240 V

49 x 27.2 x 20 mm



Model	Irated	Prated	Urangle	PF	Ripple	Certification
LSTC3W350LRP	350 mA	2.5–4.5 W	7–13 V	0.85C–0.95	±8 %	



220–240 V

49 x 27.2 x 20 mm



Model	Irated	Prated	Urangle	PF	Ripple	Certification
LSTC7W150LRP	150 mA	3.8–6.3 W	25–42 V	0.9 C	±10 %	
LSTC7W200LRP	200 mA	4.2–7 W	21–35 V	0.9 C	±10 %	
LSTC7W250LRP	250 mA	4–6.5 W	16–26 V	0.9 C	±8 %	
LSTC7W300LRP	300 mA	4.2–7.2 W	14–24 V	0.9 C	±8 %	
LSTC7W350LRP	350 mA	4.2–7.3 W	12–21 V	0.9 C	±8 %	
LSTC7W500LRP	500 mA	3.3–6.5 W	6.5–13 V	0.9 C	±8 %	
LSTC7W630LRP	630 mA	3.8–6.3 W	6–10 V	0.9 C	±8 %	
LSTC7W700LRP	700 mA	4.2–7 W	6–10 V	0.9 C	±8 %	



TRAILING EDGE DIMMABLE

□ Round shape built-in with leads out

220–240 V Ø 44.3 x 25 mm 

Model	Irated	Prated	Urangle	PF	Ripple	Certification
G6RT7W150LRP	150 mA	4.5–6.3 W	30–42 V	0.9C–0.95	±5 %	ENEC
G6RT7W350LRP	350 mA	4.2–7.7 W	12–22 V	0.9C–0.95	±5 %	ENEC
G6RT7W500LRP	500 mA	4.5–6.5 W	9–13 V	0.9C–0.95	±5 %	ENEC
G6RT7W700LRP	700 mA	4.2–6.3 W	6–9 V	0.9C–0.95	±5 %	ENEC



220–240 V Ø 48 x 25 mm 

Model	Irated	Prated	Urangle	PF	Ripple	Certification
G6RT10W200LRP	200 mA	6–8.4 W	30–42 V	0.9C–0.95	±5 %	ENEC
G6RT10W250LRP	250 mA	7.5–10.5 W	30–42 V	0.9C–0.95	±5 %	ENEC
G6RT10W350LRP	350 mA	4.6–9.1 W	13–26 V	0.9C–0.95	±5 %	ENEC
G6RT10W500LRP	500 mA	6–10 W	12–20 V	0.9C–0.95	±5 %	ENEC
G6RT10W700LRP	700 mA	6–9 W	8.6–12.9 V	0.9C–0.95	±5 %	ENEC



220–240 V Ø 48 x 25 mm 

Model	Irated	Prated	Urangle	PF	Ripple	Certification
G6RT15W300LRP	300 mA	7.8–12.9 W	26–43 V	0.9C–0.95	±5 %	ENEC
G6RT15W350LRP	350 mA	9.1–15 W	26–43 V	0.9C–0.95	±5 %	ENEC
G6RT15W500LRP	500 mA	9–15 W	18–30 V	0.9C–0.95	±5 %	ENEC
G6RT15W700LRP	700 mA	9.1–14.7 W	13–21 V	0.9C–0.95	±5 %	ENEC




220–240 V Ø 55 x 22 mm 

Model	Irated	Prated	Urangle	PF	Ripple	Certification
G5RT20W500LRP	500 mA	12.5–21 W	25–42 V	0.9 C	±5 %	ENEC



220–240 V Ø 65 x 30 mm 

Model	Irated	Prated	Urangle	PF	Ripple	Certification
G5RT30W600LRP	600 mA	15–25.2 W	25–42 V	0.9 C	±5 %	ENEC
G5RT30W700LRP	700 mA	17.5–29.4 W	25–42 V	0.9 C	±5 %	ENEC
G5RT30W800LRP	800 mA	20–32 W	25–40 V	0.9 C	±5 %	ENEC



TRAILING EDGE DIMMABLE

□ Round shape independent | class II

220–240 V R.C
 Ø 48 x 25 mm

Model	Irated	Prated	Urangle	PF	Ripple	Certification
G5RT7W150LR-S	150 mA	4.5–6.3 W	30–42 V	0.9 C	±5 %	
G5RT7W350LR-S	350 mA	4.2–7.7 W	12–22 V	0.9 C	±5 %	
G5RT7W500LR-S	500 mA	4.5–6.5 W	9–13 V	0.9 C	±5 %	
G5RT7W700LR-S	700 mA	4.2–6.3 W	6–9 V	0.9 C	±5 %	



□ Independent with terminals

220–240 V R.C
 68.4 x 33.2 x 21.8 mm

Model	Irated	Prated	Urangle	PF	Ripple	Certification
G6LT7W150LR-Z	150 mA	4.5–6.3 W	30–42 V	0.9C–0.95	±5 %	ENEC
G6LT7W350LR-Z	350 mA	4.2–7.4 W	12–21 V	0.9C–0.95	±5 %	ENEC
G6LT7W500LR-Z	500 mA	4.5–7 W	9–14 V	0.9C–0.95	±5 %	ENEC
G6LT7W700LR-Z	700 mA	4.2–7 W	6–10 V	0.9C–0.95	±5 %	ENEC



220–240 V R.C
 85 x 40.4 x 22 mm

Model	Irated	Prated	Urangle	PF	Ripple	Certification
G6LT10W200LR-Z	200 mA	6–8.4 W	30–42 V	0.9C–0.95	±5 %	ENEC
G6LT10W250LR-Z	250 mA	7.5–10.5 W	30–42 V	0.9C–0.95	±5 %	ENEC
G6LT10W350LR-Z	350 mA	4.55–9.1 W	13–26 V	0.9C–0.95	±5 %	ENEC
G6LT10W500LR-Z	500 mA	6–10 W	12–20 V	0.9C–0.95	±5 %	ENEC
G6LT10W700LR-Z	700 mA	6–9 W	8.6–12.9 V	0.9C–0.95	±5 %	ENEC



220–240 V R.C
 85 x 40.4 x 22 mm

Model	Irated	Prated	Urangle	PF	Ripple	Certification
G6LT15W300LR-Z	300 mA	7.8–12.9 W	26–43 V	0.9C–0.95	±5 %	ENEC
G6LT15W350LR-Z	350 mA	9.1–15 W	26–43 V	0.9C–0.95	±5 %	ENEC
G6LT15W500LR-Z	500 mA	9–15 W	18–30 V	0.9C–0.95	±5 %	ENEC
G6LT15W700LR-Z	700 mA	9.1–14.7 W	13–21 V	0.9C–0.95	±5 %	ENEC




TRAILING EDGE DIMMABLE

Cube Power | high performance | independent | screwless

220–240 V 115 x 41 x 25 mm 


Model	Irated	Prated	Urangle	PF	Ripple	Certification
LETC10W200LR-Z	200 mA	5–8.2 W	25–42 V	0.9 C	±5 %	ENEC
LETC10W250LR-Z	250 mA	6.3–10.5 W	25–42 V	0.9 C	±5 %	ENEC
LETC10W300LR-Z	300 mA	3.9–7.8 W	13–26 V	0.9 C	±5 %	ENEC
LETC10W350LR-Z	350 mA	4.6–9.1 W	13–26 V	0.9 C	±5 %	ENEC
LETC10W450LR-Z	450 mA	5.4–9.4 W	12–21 V	0.9 C	±5 %	ENEC
LETC10W500LR-Z	500 mA	6–10.5 W	12–21 V	0.9 C	±5 %	ENEC



220–240 V 115 x 41 x 25 mm 


Model	Irated	Prated	Urangle	PF	Ripple	Certification
LETC15W300LR-Z	300 mA	7.5–12.6 W	25–42 V	0.9 C	±5 %	ENEC
LETC15W350LR-Z	350 mA	8.8–14.7 W	25–42 V	0.9 C	±5 %	ENEC
LETC15W450LR-Z	450 mA	7.7–13.5 W	17–30 V	0.9 C	±5 %	ENEC
LETC15W500LR-Z	500 mA	8.5–15 W	17–30 V	0.9 C	±5 %	ENEC



220–240 V 115 x 41 x 25 mm 

Model	Irated	Prated	Urangle	PF	Ripple	Certification
LETC20W350LR-Z	350 mA	11.2–18.9 W	32–54 V	0.9 C	±4 %	ENEC
LETC20W500LR-Z	500 mA	12.5–21 W	25–42 V	0.9 C	±4 %	ENEC
LETC20W700LR-Z	700 mA	12.6–18.2 W	18–26 V	0.9 C	±4 %	ENEC




220–240 V 145 x 40 x 30 mm 

Model	Irated	Prated	Urangle	PF	Ripple	Certification
LETC32W600LR-Z	600 mA	15–25.2 W	25–42 V	0.9 C	±5 %	ENEC
LETC32W700LR-Z	700 mA	17.5–29.4 W	25–42 V	0.9 C	±5 %	ENEC
LETC32W800LR-Z	800 mA	20–32 W	25–40 V	0.9 C	±5 %	ENEC





220–240 V 145 x 40 x 30 mm 

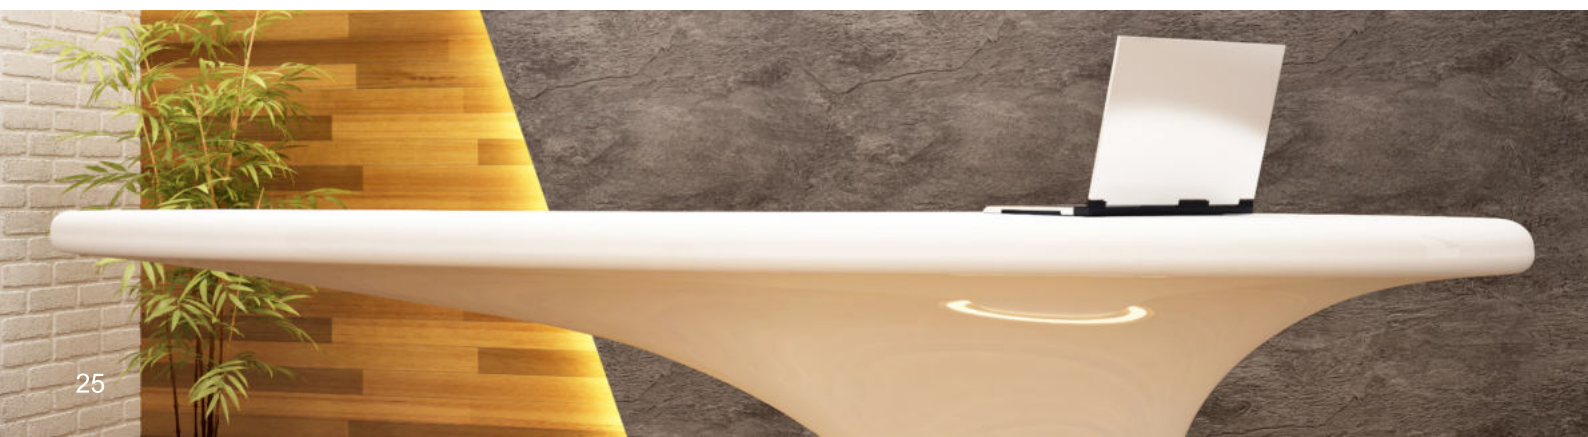Model	Irated	Prated	Urangle	PF	Ripple	Certification
LETC42W700LR-Z	700 mA	22.4–37.8 W	32–54 V	0.9 C	±4 %	ENEC
LETC42W900LR-Z	900 mA	22.5–36 W	25–40 V	0.9 C	±4 %	ENEC
LETC42W1000LR-Z	1000 mA	25–40 W	25–40 V	0.9 C	±4 %	ENEC
LETC42W1050LR-Z	1050 mA	26.3–42 W	25–40 V	0.9 C	±4 %	ENEC




0/1-10 V DIMMABLE



 Independent | built-in with terminals | current adjust via DIP SWITCH

120–277 V		112.8 (141.8) x 43.8 x 30 mm						
Model	Irated	Prated	Urage	PF	Ripple	Certification		
LBC10W300CALR-1C UNI	200 mA	5.2–8.4 W	26–42 V					
	250 mA	6.5–10.5 W	26–42 V	0.9 C	±5 %	ENEC		
	280 mA	7.3–11.7 W	26–42 V					
	300 mA	7.8–12.6 W	26–42 V					
LBC10W700CALR-1C UNI	350 mA	5.3–10.1 W	15–29 V	0.9 C	±5 %	ENEC		
	500 mA	7.5–10 W	15–20 V					
	550 mA	8.3–9.9 W	15–18 V					
LBC20W700CALR-1C UNI	350 mA	6.3–18.2 W	18–52 V	0.9 C	±5 %	ENEC		
	500 mA	9–20 W	18–40 V					
	550 mA	9.9–19.8 W	18–36 V					
	700 mA	12.6–19.6 W	18–28 V					

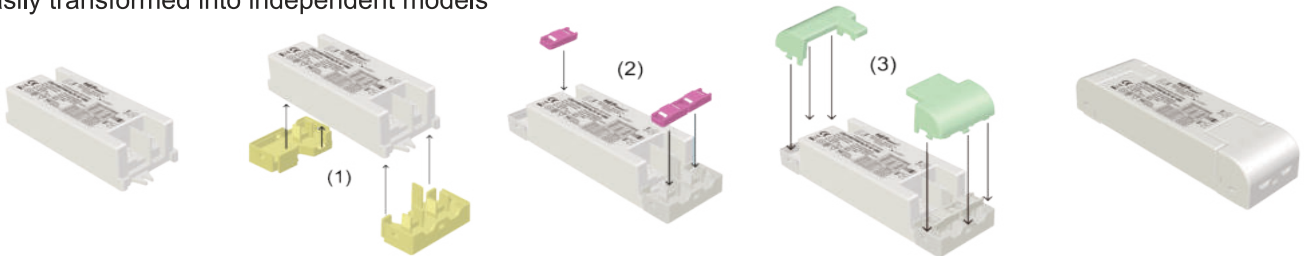



Easily transformed into independent models




120–277 V		103.5 (123) x 79 x 30 mm						
Model	Irated	Prated	Urage	PF	Ripple	Certification		
LTC40W1000CALR-1C UNI	700 mA	7–33.6 W	10–48 V					
	800 mA	8–38.4 W	10–48 V	0.6C–0.9 C	±5 %	ENEC		
	900 mA	9–39.6 W	10–44 V					
	1000 mA	10–40 W	10–40 V					
LTC40W1400CALR-1C UNI	1100 mA	11–39.6 W	10–36 V	0.7C–0.9 C	±5 %	ENEC		
	1200 mA	12–39.6 W	10–33 V					
	1300 mA	13–40.3 W	10–31 V					
	1400 mA	14–40.6 W	10–29 V					



120–277 V		103.5 (123) x 79 x 30 mm						
Model	Irated	Prated	Urage	PF	Ripple	Certification		
LTC60W1100CALR-1C UNI	950 mA	9.5–45.6 W	10–48 V					
	1000 mA	10–48 W	10–48 V	0.6C–0.9 C	±5 %	ENEC		
	1050 mA	10.5–50.4 W	10–48 V					
	1100 mA	11–52.8 W	10–48 V					
LTC60W1500CALR-1C UNI	1200 mA	12–50.4 W	10–42 V	0.6–0.9 C	±5 %	ENEC		
	1300 mA	13–54.6 W	10–42 V					
	1400 mA	14–58.8 W	10–42 V					
	1500 mA	15–60 W	10–40 V					



Easily transformed into independent models

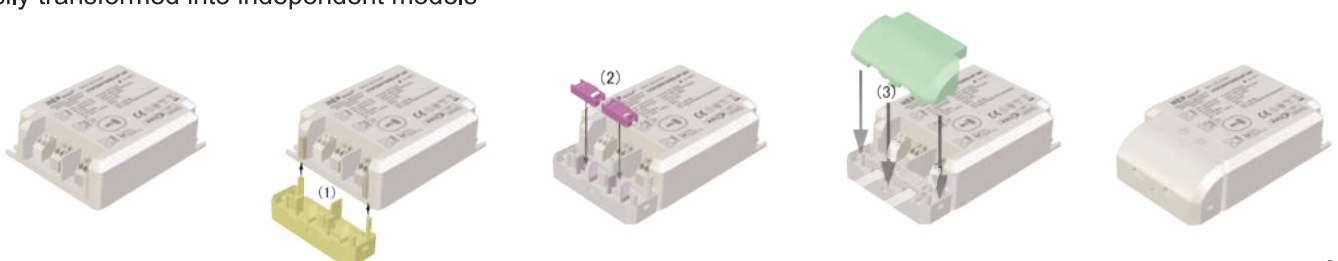

BUILT-IN / INDEPENDENT



Current adjust via NFC | wireless control | single channel

220–240 V 112.8 (141.8) x 43.8 x 30 mm



Model	Irated	Prated	Urangle	PF	Ripple
LLWC12W300NLR	150-300 mA	1.5–12 W	10–40 V	0.5–0.9 C	±5 %
LLWC25W600NLR	350-600 mA	3.5–25.2 W	10–42 V	0.5–0.9 C	±5 %




Current adjust via NFC | wireless control | tunable white

220–240 V 112.8 (141.8) x 43.8 x 30 mm



Model	Irated	Prated	Urangle	PF	Ripple
LLWC12W300NLR-T	150-300 mA	1.5–12 W	10–40 V	0.5–0.9 C	±5 %

Easily transformed into independent models

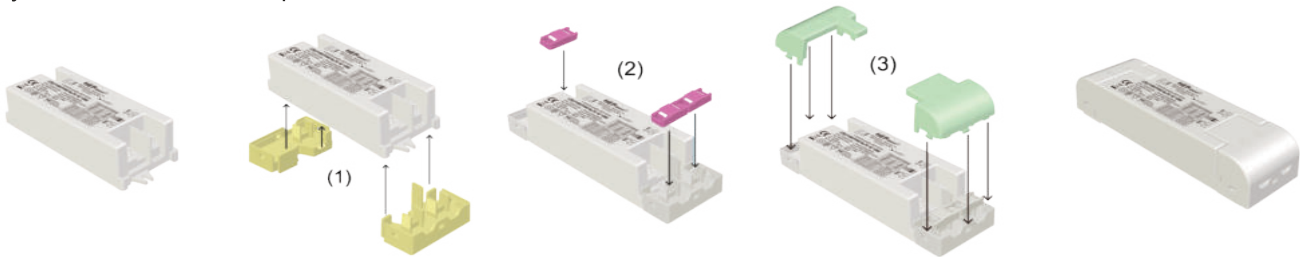

Current adjust via NFC | wireless control | single channel



220–240 V 103.5 (123) x 79 x 30 mm



Model	Irated	Prated	Urangle	PF	Ripple
LTWC40W1050NLR	500-1050 mA	5–42 W	10–42 V	0.95	±5 %



Easily transformed into independent models

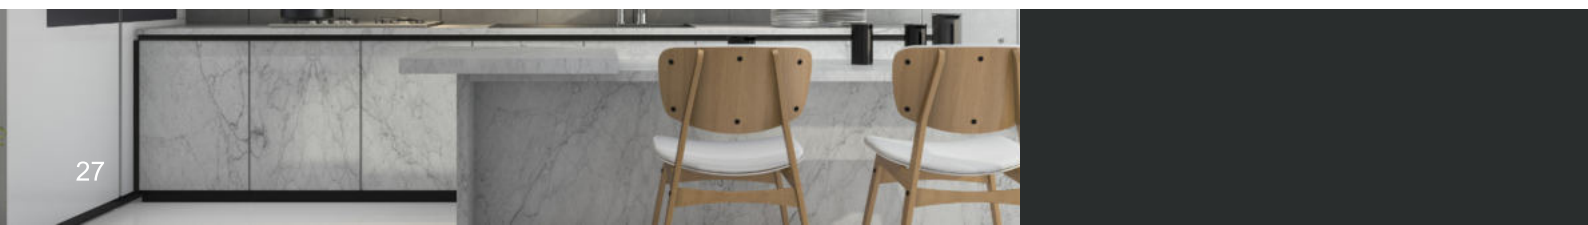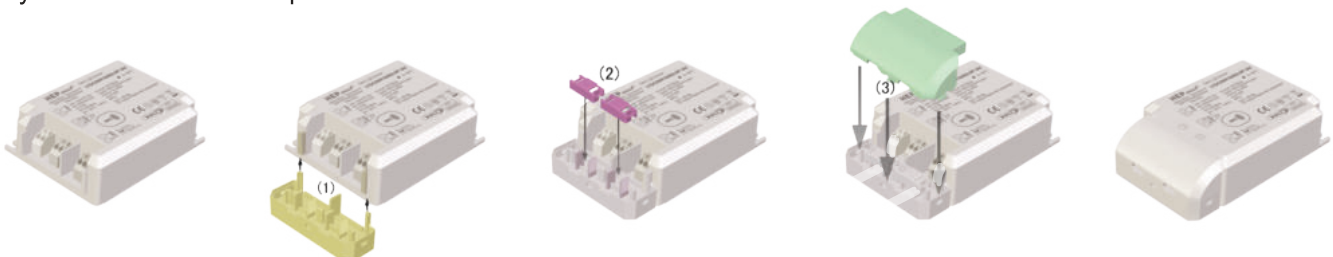

WIRELESS CONTROL



External RF module allows 3 dimming options for just one driver

43 x 37.6 x 12 mm

Model			APP
WBSB		TUYA Bluetooth	Smart Life / Tuya Smart
WZSB	Single Channel	TUYA ZigBee	Smart Life / Tuya Smart
WBSD		CASAMBI	CASAMBI



only suitable for LLWC12/25 & LTWC40

43 x 37.6 x 12 mm

Model			APP
WBDB		TUYA Bluetooth	Smart Life / Tuya Smart
WZDB	Tunable white	TUYA ZigBee	Smart Life / Tuya Smart
WBDD		CASAMBI	CASAMBI



only suitable for LLWC12W300NLR-T



LIGHTING CONTROL APP

CASAMBI

CASAMBI



TUYA

Tuya(Smart Life)



Apps can be downloaded on Apple Store and Google Play Store for iOS and Android. You can either search for the App names or scan the QR codes above.



NFC

Use NFC technology to quickly change the driver current, reduce the burden on the engineer and to set the color tuning range.

Further information and links to downloads can be found on the website.

HEPxNFC



Smartphone App for Android and iOS



NFCApplication

Desktop application for Windows




SANF-G
HEP GmbH



ID CPR30-USB
FEIGElectronics

Compatible LED Driver

View all compatible NFC LED Driver @ www.hepgmbh.de.





03

Constant Current
NON-DIMMABLE



INTELLIGENT TYPES

MINI TYPES




MINI TYPES

□ Round shape built-in with leads out

220–240 V Ø 43.8 x 23 mm

Model	Irated	Prated	Urangle	PF	Ripple	Certification
G6R7W150LRP	150 mA	4.8–6.3 W	32–42 Vdc	0.85C–0.92C	±5 %	ENEC
G6R7W300LRP	300 mA	3.9–6.6 W	13–22 Vdc	0.85C–0.92C	±5 %	ENEC
G6R7W350LRP	350 mA	4.6–7.7 W	13–22 Vdc	0.85C–0.92C	±5 %	ENEC
G6R7W500LRP	500 mA	3–6.5 W	6–13 Vdc	0.85C–0.92C	±5 %	ENEC
G6R7W700LRP	700 mA	3.9–6.3 W	5.5–9 Vdc	0.85C–0.92C	±5 %	ENEC



220–240 V Ø 48 x 22 mm

Model	Irated	Prated	Urangle	PF	Ripple	Certification
G5R10W200LRP	200 mA	6–9 W	30–42 V	0.9 C	±4 %	ENEC
G5R10W250LRP	250 mA	7.5–10 W	30–42 V	0.9 C	±4 %	ENEC
G5R10W350LRP	350 mA	4.6–10 W	13–26 V	0.9 C	±4 %	ENEC
G5R10W500LRP	500 mA	6–10 W	12–20 V	0.9 C	±4 %	ENEC
G5R10W700LRP	700 mA	6–10 W	8.6–12.9 V	0.9 C	±4 %	ENEC



220–240 V Ø 48 x 22 mm

Model	Irated	Prated	Urangle	PF	Ripple	Certification
G5R15W300LRP	300 mA	7.5–13 W	26–43 V	0.9 C	±5 %	ENEC
G5R15W350LRP	350 mA	9–15 W	26–43 V	0.9 C	±5 %	ENEC
G5R15W500LRP	500 mA	9–15 W	18–30 V	0.9 C	±5 %	ENEC
G5R15W700LRP	700 mA	9–15 W	13–21 V	0.9 C	±5 %	ENEC



220–240 V Ø 55 x 22 mm

Model	Irated	Prated	Urangle	PF	Ripple	Certification
G5R20W500LRP	500 mA	15–21 W	30–42 V	0.9 C	±4 %	ENEC



220–240 V Ø 65 x 27 mm

Model	Irated	Prated	Urangle	PF	Ripple	Certification
G5R30W600LRP	600 mA	18–25 W	30–42 V	0.9 C	±2.5 %	ENEC
G5R30W700LRP	700 mA	21–29.5 W	30–42 V	0.9 C	±2.5 %	ENEC
G5R30W800LRP	800 mA	24–32 W	30–40 V	0.9 C	±2.5 %	ENEC



MINI TYPES

□ Square shape built-in with leads out

100-240 V 49 x 27.2 x 20 mm

Model	Irated	Prated	Urangle	PF	Ripple	Certification
LSC4W200LRP UNI	200 mA	2.6-3.5 W	13-17.5 V	0.45-0.64 C	±5 %	ENEC
LSC4W350LRP UNI	350 mA	1.0-3.3 W	2.7-9.5 V	0.37-0.65 C	±5 %	ENEC
LSC4W500LRP UNI	500 mA	1.4-3.2 W	2.7-6.5 V	0.4-0.61 C	±5 %	ENEC
LSC4W700LRP UNI	700 mA	1.9-3.1 W	2.7-4.5 V	0.45-0.65 C	±5 %	ENEC



220-240 V 49 x 27.2 x 20 mm

Model	Irated	Prated	Urangle	PF	Ripple	Certification
LSC7W150LRP	150 mA	3.8-6.3 W	25-42 V	0.9 C	±7 %	ENEC
LSC7W200LRP	200 mA	4-7.2 W	20-36 V	0.9 C	±6 %	ENEC
LSC7W250LRP	250 mA	4-6 W	16-24 V	0.9 C	±6 %	ENEC
LSC7W300LRP	300 mA	3.6-6.3 W	12-21 V	0.9 C	±5 %	ENEC
LSC7W350LRP	350 mA	4.2-7.3 W	12-21 V	0.9 C	±5 %	ENEC
LSC7W500LRP	500 mA	3.3-6.5 W	6.5-13 V	0.9 C	±5 %	ENEC
LSC7W630LRP	630 mA	3.8-7.2 W	6-11.5 V	0.9 C	±5 %	ENEC
LSC7W700LRP	700 mA	4.2-7 W	6-10 V	0.9 C	±5 %	ENEC



100-277 V 60 x 40 x 24 mm

Model	Irated	Prated	Urangle	PF	Ripple	Certification
LSC9W300LRP UNI	300 mA	4.2-8.2 W	14-27.5 V	0.75C-0.99	±5 %	ENEC
LSC9W350LRP UNI	350 mA	3.9-8.4 W	11-24 V	0.7C-0.99	±5 %	ENEC
LSC9W480LRP UNI	480 mA	3.9-10 W	8-21 V	0.71C-0.99	±5 %	ENEC
LSC9W500LRP UNI	500 mA	5-10 W	10-20 V	0.76C-0.99	±5 %	ENEC
LSC9W700LRP UNI	700 mA	4.2-9.1 W	6-13 V	0.7C-0.99	±5 %	ENEC



100-277 V 63.3 x 40 x 23 mm

Model	Irated	Prated	Urangle	PF	Ripple	Certification
LSC15W350LRP UNI	350 mA	8.1-15 W	23-43 V	0.82C-0.99	±5 %	ENEC
LSC15W500LRP UNI	500 mA	9-15 W	18-30 V	0.85C-0.99	±5 %	ENEC
LSC15W700LRP UNI	700 mA	8.4-15.4 W	12-22 V	0.85C-0.99	±5 %	ENEC



100-277 V 69.3 x 43.5 x 24.6 mm

Model	Irated	Prated	Urangle	PF	Ripple	Certification
LSC20W250LRP UNI	250 mA	8-13.7 W	32-55 V	0.75C-0.99	±5 %	ENEC
LSC20W350LRP UNI	350 mA	11.2-19.2 W	32-55 V	0.79C-0.99	±5 %	ENEC
LSC20W500LRP UNI	500 mA	12-22.5 W	24-45 V	0.73C-0.99	±5 %	ENEC
LSC20W700LRP UNI	700 mA	10.5-19.6 W	15 - 28 V	0.74C-0.99	±5 %	ENEC
LSC20W500LLRP UNI	500 mA	9-15 W	18-30 V	0.9C	±5 %	ENEC



220-240 V 89 x 45 x 32 mm

Model	Irated	Prated	Urangle	PF	Ripple	Certification
G5S40W700LRP	700 mA	21-29.5 W	30-42 V	0.9 C	±3 %	ENEC
G5S40W800LRP	800 mA	24-33.5 W	30-42 V	0.9 C	±3 %	ENEC
G5S40W900LRP	900 mA	27-38 W	30-42 V	0.9 C	±3 %	ENEC
G5S40W1050LRP	1050 mA	31.5-42 W	30-40 V	0.9 C	±3 %	ENEC



REGULAR TYPES

 Independent | built-in with terminals

100-240 V 65 x 29 x 18 mm

Model	Irated	Prated	Urange	PF	Ripple	Certification
LSC3W200LR-Z UNI	200 mA	2.6-3.6 W	13-18 V	0.40 C	±5 %	ENEC
LSC3W350LR-Z UNI	350 mA	1-3.5 W	2.7-10 V	0.40 C	±5 %	ENEC
LSC3W500LR-Z UNI	500 mA	1.4-3.5 W	2.7-7 V	0.40 C	±5 %	ENEC
LSC3W700LR-Z UNI	700 mA	1.9-2.8 W	2.7-4 V	0.40 C	±5 %	ENEC



100-240 V 55.6 (66.3) x 38.5 x 21.8 mm

Model	Irated	Prated	Urange	PF	Ripple	Certification
LSC6W250LR(-Z) UNI	250 mA	2.2-6 W	8.6-24 V	0.9 C	±5 %	CE only
LSC6W350LR(-Z) UNI	350 mA	3-6.3 W	8.6-18 V	0.83C-0.99	±5 %	ENEC
LSC6W500LR(-Z) UNI	500 mA	3-6 W	6-12 V	0.86C-0.99	±5 %	ENEC
LSC6W700LR(-Z) UNI	700 mA	3-6.3 W	4.3-9 V	0.83C-0.99	±5 %	ENEC



220-240 V 58.1 (65) x 39.1 x 20 mm

Model	Irated	Prated	Urange	PF	Ripple	Certification
G5S10W200LR(-Z)	200 mA	5.8-8.4 W	29-42 V	0.9 C	±5 %	ENEC
G5S10W250LR(-Z)	250 mA	6.5-10 W	26-40 V	0.9 C	±5 %	ENEC
G5S10W350LR(-Z)	350 mA	6-10.1 W	17-29 V	0.9 C	±5 %	ENEC
G5S10W450LR(-Z)	450 mA	5.9-9 W	13-20 V	0.9 C	±5 %	ENEC
G5S10W500LR(-Z)	500 mA	6.5-10 W	13-20 V	0.9 C	±5 %	ENEC
G5S10W700LR(-Z)	700 mA	6.1-10.1 W	8.6-14.5 V	0.9 C	±5 %	ENEC



220-240 V 85 x 40.4 x 22 mm

Model	Irated	Prated	Urange	PF	Ripple	Certification
G5S15W300LR-Z	300 mA	8-12.5 W	26-42 V	0.9 C	±5 %	ENEC
G5S15W350LR-Z	350 mA	9-14.5 W	26-42 V	0.9 C	±5 %	ENEC
G5S15W500LR-Z	500 mA	9-15 W	18-30 V	0.9 C	±5 %	ENEC
G5S15W700LR-Z	700 mA	9-14.5 W	13-21 V	0.9 C	±5 %	ENEC
G5S15W1050LR-Z	1050 mA	9.5-15.5 W	9-15 V	0.9 C	±5 %	ENEC



220-240 V 85 x 40.4 x 22 mm 

Model	Irated	Prated	Urange	PF	Ripple	Certification
G5S20W500CA-Z (current adjust)	250 mA	7.5-10.5 W	30-42 V	0.9 C	±4 %	ENEC
	350 mA	10.5-14.5 W	30-42 V	0.9 C	±4 %	ENEC
	410 mA	12-17 W	30-42 V	0.9 C	±4 %	ENEC
	500 mA	15-21 W	30-42 V	0.9 C	±4 %	ENEC



CUBE POWER SERIES

High performance | independent & screwless

220-240 V

Model	Irated	Prated	Urange	PF	Ripple	Certification	Dimension
LEC8W200LR-Z	200 mA	5–8 W	25–40 V	0,9 C	±5 %	ENEC	90 x 40 x 22 mm
LEC14W350LR-Z	350 mA	8.8–14 W	25–40 V	0,9 C	±5 %	ENEC	115 x 41 x 25 mm
LEC20W500LR-Z	500 mA	12,5–20 W	25–40 V	0,9 C	±5 %	ENEC	115 x 41 x 25 mm
LEC28W700LR-Z	700 mA	17,5–28 W	25–40 V	0,9 C	±5 %	ENEC	145 x 40 x 30 mm
LEC40W1000LR-Z	1000 mA	25–40 W	25–40 V	0,9 C	±5 %	ENEC	145 x 40 x 30 mm



INTELLIGENT TYPE

HEPxNFC




Independent with terminal | Current adjust via NFC

220-240 V

NFC))

Model	Irated	Prated	Urange	PF	Ripple	Certification	Dimension
LMC10W700NLR-Z	250–700 mA	0,8–10,5 W	3–30 V	0,4-0,9 C	±5 %		85 x 40,4 x 22 mm

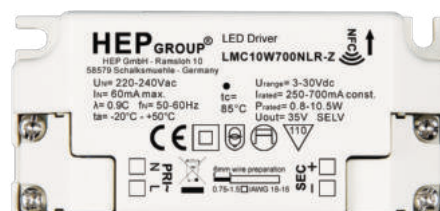





04

Constant Voltage DIMMABLE



TUNABLE WHITE

TRAILING EDGE DIMMABLE

DALI-2 DIMMABLE

1-10 V DIMMABLE



DALI-2 DIMMABLE

DALI-2 DT8 dimmable | Tunable white

220-240 V




Model	Urated	Prated	Irange	PF	Certification	Dimension
LADV60W24Z-T2CH	24 V	5–60 W	2500 mA max.	0.95	ENEC	201.6 x 58 x 30 mm
LADV100W24Z-T2CH	24 V	5–100 W	4160 mA max.	0.95	ENEC	347.2 x 40 x 22 mm
LADV150W24Z-T2CH	24 V	5–150 W	6250 mA max.	0.95	ENEC	425 x 45 x 21 mm
LADV200W24Z-T2CH	24 V	5–200 W	8330 mA max.	0.95	ENEC	425 x 48.2 x 25.3 mm

DALI-2 DT6 dimmable

220-240 V



Model	Urated	Prated	Irange	PF	Certification	Dimension
LADV60W24-Z	24 V	5–60 W	2500 mA max.	0.95	ENEC	201.6 x 58 x 30 mm
LADV100W24-Z	24 V	5–100 W	4160 mA max.	0.95	ENEC	347.2 x 40 x 22 mm
LADV150W24-Z	24 V	5–150 W	6250 mA max.	0.95	ENEC	425 x 45 x 21 mm
LADV200W24-Z	24 V	5–200 W	8330 mA max.	0.95	ENEC	425 x 48.2 x 25.3 mm

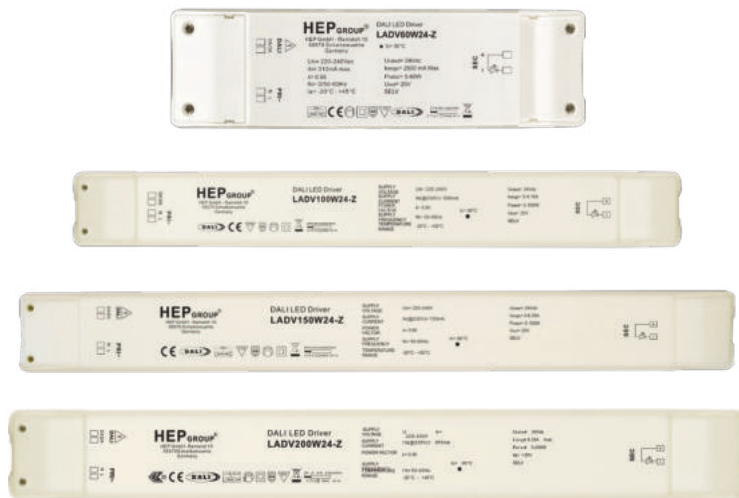

DALI-2 DT6 dimmable | voltage adjust via DIP-SWITCH

220–240 V



Model	Urated	Prated	Irange	PF	Certification	Dimension
LADV30W24VA	12 V	2–30 W	2500 mA max.	0.9 C	ENEC	279 x 30.2 x 21.4 mm
	24 V	4–30 W	1250 mA max.	0.9 C	ENEC	



TRAILING EDGE DIMMABLE

 Trailing edge dimmable

220-240 V



Model	Urated	Prated	Irange	PF	Certification	Dimension
LATV60W24-Z	24 V	12-60 W	500-2500 mA	0.95		201.6 x 58 x 30 mm







05

Constant Voltage
NON-DIMMABLE



COMPACT TYPES

OUTDOOR

LINEAR TYPES



COMPACT TYPES

100-240 V 48.5 x 39 x 20 mm

Model	Urated	Prated	Irange	PF	Certification
LBV4W12 UNI	12 V	0-4 W	333 mA max.	0,3-0,9C	ENEC
LBV4W24 UNI	24 V	0-4 W	166 mA max.	0,3-0,9C	ENEC



100-240 V 65 x 39 x 20 mm

Model	Urated	Prated	Irange	PF	Certification
LBV6W12-Z UNI	12 V	0-6 W	500 mA max.	0,3-0,9C	ENEC
LBV6W24-Z UNI	24 V	0-6 W	250 mA max.	0,25-0,9C	ENEC
LBV6W48-Z UNI	48 V	0-6 W	125 mA max.	0,25-0,9C	ENEC



100-240 V 106.2 x 32.9 x 21.5 mm

Model	Urated	Prated	Irange	PF	Certification
LBV12W12-Z UNI	12 V	0-12 W	1000 mA max.	0,4-0,9C	ENEC
LBV12W24-Z UNI	24 V	0-12 W	500 mA max.	0,3-0,9C	ENEC
LBV12W48-Z UNI	48 V	0-12 W	250 mA max.	0,2-0,9C	ENEC




120-240 V 106.2 x 32.9 x 21.5 mm

Model	Urated	Prated	Irange	PF	Certification
LBV15W12-Z UNI	12 V	0-15 W	1250 mA max.	0,15-0,9C	ENEC
LBV15W24-Z UNI	24 V	0-15 W	625 mA max.	0,2-0,9C	ENEC



COMPACT TYPES

220–240 V		115 x 41 x 25 mm				
Model	Urated	Prated	Irange	PF	Certification	
LBV20W24VA-Z	12 V 24 V	0–18 W 0–20 W	1500 mA max. 833 mA max.	0.2C-0.95	ENEC	



220–240 V		180 x 45 x 27 mm			
Model	Urated	Prated	Irange	PF	Certification
LBV40W12-Z	12 V	0–40 W	3340 mA max.	0.1C-0.95	ENEC
LBV40W24-Z	24 V	0–40 W	1666 mA max.	0.1C-0.95	ENEC



220–240 V		180 x 45 x 27 mm			
Model	Urated	Prated	Irange	PF	Certification
LBV60W24-Z	24 V	0–60 W	2500 mA max.	0.1C-0.95	ENEC
LBV60W48-Z	48 V	0–60 W	1250 mA max.	0.1C-0.95	ENEC



220–240 V		190.5 x 88 x 35.5 mm			
Model	Urated	Prated	Irange	PF	Certification
LHV100W24	24 V	0–100 W	4200 mA max.	0.95	ENEC
LHV150W24-Z	24 V	0–150 W	6250 mA max.	0.98	ENEC
LHV150W48-Z	48 V	0–150 W	3125 mA max.	0.98	ENEC



220–240 V		Ø 55 x 22 mm			
Model	Urated	Prated	Irange	PF	Certification
LRV15W12P	12 V	0–15 W	1250 mA max.	0.9 C	ENEC
LRV15W24P	24 V	0–15 W	625 mA max.	0.9 C	ENEC



LINEAR TYPES

□ Non-dimmable

220-240 V

Model	Urated	Prated	Irange	PF	Certification	Dimension
LAV100W24-Z	24 V	0-100 W	4160 mA max.	0.95	ENEC	347.2 x 40 x 22 mm
LAV150W24-Z	24 V	0-150 W	6250 mA max.	0.95	ENEC	425 x 45 x 21 mm



OUTDOOR

IP 67 | dust proof | water proof

100-240 V

162 x 37 x 25 mm

Model	Urated	Prated	Irange	PF	Certification
LEXV18W12	12 V	0-18 W	1500 mA max.	0.55 C	TÜV
LEXV18W24	24 V	0-18 W	750 mA max.	0.55 C	TÜV



100 - 240 V

232 x 36.6 x 25 mm

Model	Urated	Prated	Irange	PF	Certification
LEXV40W12	12 V	0-40 W	3340 mA max.	0.95	TÜV
LEXV40W24	24 V	0-40 W	1670 mA max.	0.95	TÜV



100 - 240 V

182 x 71.2 x 45 mm

Model	Urated	Prated	Irange	PF	Certification
LEXV60W24	24 V	0-60 W	2500 mA max.	0.97	TÜV



100 - 240 V

202 x 71.2 x 45 mm

Model	Urated	Prated	Irange	PF	Certification
LEXV100W24	24 V	0-100 W	4200 mA max.	0.97	TÜV



100 - 240 V

244 x 71.2 x 45 mm

Model	Urated	Prated	Irange	PF	Certification
LEXV150W24	24 V	0-150 W	6000 mA max.	0.95	TÜV



220 - 240 V

252 x 90 x 44.5 mm

Model	Urated	Prated	Irange	PF	Certification
LEXV250W24	24 V	0-250 W	10420 mA max.	0.95	TÜV



ALPHABETIC REGISTER

Model	Page
G5DC40W1000CA	11
G5DDC10W250CA	11
G5DDC10W250CA-T	11
G5DDC30W700CA	11
G5R10W200LRP	33
G5R10W250LRP	33
G5R10W350LRP	33
G5R10W500LRP	33
G5R10W700LRP	33
G5R15W300LRP	33
G5R15W350LRP	33
G5R15W500LRP	33
G5R15W700LRP	33
G5R20W500LRP	33
G5R30W600LRP	33
G5R30W700LRP	33
G5R30W800LRP	33
G5RT20W500LRP	23
G5RT30W600LRP	23
G5RT30W700LRP	23
G5RT30W800LRP	23
G5RT7W150LR-S	24
G5RT7W350LR-S	24
G5RT7W500LR-S	24
G5RT7W700LR-S	24
G5S10W200LR(-Z)	35
G5S10W250LR(-Z)	35
G5S10W350LR(-Z)	35
G5S10W450LR(-Z)	35
G5S10W500LR(-Z)	35
G5S10W700LR(-Z)	35
G5S15W1050LR-Z	35
G5S15W300LR-Z	35
G5S15W350LR-Z	35
G5S15W500LR-Z	35
G5S15W700LR-Z	35
G5S20W500CA-Z	35
G5S40W1050LRP	34
G5S40W700LRP	34
G5S40W800LRP	34
G5S40W900LRP	34
G6LT10W200LR-Z	24
G6LT10W250LR-Z	24
G6LT10W350LR-Z	24
G6LT10W500LR-Z	24
G6LT10W700LR-Z	24
G6LT15W300LR-Z	24
G6LT15W350LR-Z	24
G6LT15W500LR-Z	24

Model	Page
G6LT15W700LR-Z	24
G6LT7W150LR-Z	24
G6LT7W350LR-Z	24
G6LT7W500LR-Z	24
G6LT7W700LR-Z	24
G6R7W150LRP	33
G6R7W300LRP	33
G6R7W350LRP	33
G6R7W500LRP	33
G6R7W700LRP	33
G6RT10W200LRP	23
G6RT10W250LRP	23
G6RT10W350LRP	23
G6RT10W500LRP	23
G6RT10W700LRP	23
G6RT15W300LRP	23
G6RT15W350LRP	23
G6RT15W500LRP	23
G6RT15W700LRP	23
G6RT7W150LRP	23
G6RT7W350LRP	23
G6RT7W500LRP	23
G6RT7W700LRP	23
LADC45W1050N-T2CH	16
LADV100W24-Z	39
LADV100W24Z-T2CH	39
LADV150W24-Z	39
LADV150W24Z-T2CH	39
LADV200W24-Z	39
LADV200W24Z-T2CH	39
LADV30W24VA	39
LADV60W24-Z	39
LADV60W24Z-T2CH	39
LATV60W24-Z	40
LAV100W24-Z	45
LAV150W24-Z	45
LBC10W300CALR-1C UNI	26
LBC10W700CALR-1C UNI	26
LBC20W700CALR-1C UNI	26
LBV12W12-Z UNI	43
LBV12W24-Z UNI	43
LBV12W48-Z UNI	43
LBV15W12-Z UNI	43
LBV15W24-Z UNI	43
LBV20W24VA-Z	44
LBV40W12-Z	44
LBV40W24-Z	44
LBV4W12 UNI	43

Model	Page
LBV4W24 UNI	43
LBV60W24-Z	44
LBV60W48-Z	44
LBV6W12-Z UNI	43
LBV6W24-Z UNI	43
LBV6W48-Z UNI	43
LEC14W350LR-Z	36
LEC20W500LR-Z	36
LEC28W700LR-Z	36
LEC40W1000LR-Z	36
LEC8W200LR-Z	36
LEDC30W1050NLRZ	15
LEDC45W1050NLRZ-x	15
LEDC60W1750NLRZ-x	15
LETC10W200LR-Z	25
LETC10W250LR-Z	25
LETC10W300LR-Z	25
LETC10W350LR-Z	25
LETC10W450LR-Z	25
LETC10W500LR-Z	25
LETC15W300LR-Z	25
LETC15W350LR-Z	25
LETC15W450LR-Z	25
LETC15W500LR-Z	25
LETC20W350LR-Z	25
LETC20W500LR-Z	25
LETC20W700LR-Z	25
LETC32W600LR-Z	25
LETC32W700LR-Z	25
LETC32W800LR-Z	25
LETC42W1000LR-Z	25
LETC42W1050LR-Z	25
LETC42W700LR-Z	25
LETC42W900LR-Z	25
LEXV100W24	46
LEXV150W24	46
LEXV18W12	46
LEXV18W24	46
LEXV250W24	46
LEXV40W12	46
LEXV40W24	46
LEXV60W24	46
LHV100W24	44
LHV150W24-Z	44
LHV150W48-Z	44
LIVC1A(-Z) UNI	35
LLD20W700CA	17

Model	Page
LLD30W900CA	17
LLD40W1050CA	17
LLD50W1400CA	17
LLD60W1750CA	17
LLWC12W300NLR	27
LLWC12W300NLR-T	27
LLWC25W600NLR	27
LMC10W700NLR-Z	36
LNDC10W120HLRP	19
LNDC10W150HLRP	19
LNDC10W200HLRP	19
LNDC10W200LRP	19
LNDC10W250HLRP	19
LNDC10W300LRP	19
LNDC10W350LLRP	19
LNDC10W350LRP	19
LNDC10W400LRP	19
LNDC10W450LRP	19
LNDC10W500LRP	19
LNDC15W180LRP	19
LNDC15W200LRP	19
LNDC15W250LRP	19
LNDC15W300LRP	19
LNDC15W350LRP	19
LNDC15W700NLRP-T2CH	16
LNDC20W200LRP	19
LNDC20W300LRP	19
LNDC20W350LRP	19
LNDC20W400LRP	19
LNDC20W450LRP	19
LNDC20W500LRP	19
LNDC20W550LRP	19
LNDC20W600LRP	19
LNDC20W700LRP	19
LNDC30W1000LRP	19
LNDC30W400LRP	19
LNDC30W450LRP	19
LNDC30W500LRP	19
LNDC30W550LRP	19
LNDC30W600LRP	19
LNDC30W700LRP	19
LNDC30W800LRP	19
LNDC30W900LRP	19
LNDC40W1000LRP	20
LNDC40W1050LRP	20
LNDC40W500LRP	20
LNDC40W600LRP	20
LNDC40W700LRP	20
LNDC40W800LRP	20
LNDC40W850LRP	20
LNDC40W900LRP	20
LNDC40W950LRP	20
LNDC6W120LRP	19

Model	Page
LNDC6W150LRP	19
LNDC6W200LLRP	19
LNDC6W200LRP	19
LNDC6W250HLRP	19
LNDC6W250LRP	19
LNDC6W300HLRP	19
LNDC6W300LRP	19
LNDC6W350LLRP	19
LNDC6W350LRP	19
LNTC10W200HLR	21
LNTC10W200LR	21
LNTC10W300LR	21
LNTC10W350LLR	21
LNTC10W350LR	21
LNTC10W400LR	21
LNTC10W450LR	21
LNTC10W500LR	21
LNTC10W550LR	21
LNTC10W700LR	21
LNTC15W200LR	21
LNTC15W250LR	21
LNTC15W300LR	21
LNTC15W350LR	21
LNTC20W250LRP	21
LNTC20W300LRP	21
LNTC20W350LRP	21
LNTC20W400LRP	21
LNTC20W450LRP	21
LNTC20W500LRP	21
LNTC20W600LRP	21
LNTC20W700LRP	21
LNTC30W1000LRP	21
LNTC30W1000LRP	22
LNTC30W400LRP	21
LNTC30W400LRP	22
LNTC30W450LRP	21
LNTC30W450LRP	22
LNTC30W500LRP	21
LNTC30W500LRP	22
LNTC30W550LRP	21
LNTC30W550LRP	22
LNTC30W600LRP	21
LNTC30W600LRP	22
LNTC30W700LRP	21
LNTC30W700LRP	22
LNTC30W800LRP	21
LNTC30W800LRP	22
LNTC30W900LRP	21
LNTC30W900LRP	22
LNTC6W120LR	21
LNTC6W150LR	21
LNTC6W200LR	21
LNTC6W250LR	21
LNTC6W300LR	21
LNTC6W350LR	21

Model	Page
LNTC6W400LR	21
LNTC6W450LR	21
LNTC6W500LR	21
LNTC6W700LR	21
LRV15W12P	44
LRV15W24P	44
LSC15W350LRP UNI	34
LSC15W500LRP UNI	34
LSC15W700LRP UNI	34
LSC20W250LRP UNI	34
LSC20W350LRP UNI	34
LSC20W500LLRP UNI	34
LSC20W500LRP UNI	34
LSC20W700LRP UNI	34
LSC3W200LR-Z UNI	35
LSC3W350LR-Z UNI	35
LSC3W500LR-Z UNI	35
LSC3W700LR-Z UNI	35
LSC4W200LRP UNI	34
LSC4W350LRP UNI	34
LSC4W500LRP UNI	34
LSC4W700LRP UNI	34
LSC6W250LR(-Z) UNI	35
LSC6W350LR(-Z) UNI	35
LSC6W500LR(-Z) UNI	35
LSC6W700LR(-Z) UNI	35
LSC7W150LRP UNI	34
LSC7W200LRP UNI	34
LSC7W250LRP UNI	34
LSC7W300LRP UNI	34
LSC7W350LRP UNI	34
LSC7W500LRP UNI	34
LSC7W630LRP UNI	34
LSC7W700LRPUNI	34
LSC9W300LRP UNI	34
LSC9W350LRP UNI	34
LSC9W480LRP UNI	34
LSC9W500LRP UNI	34
LSC9W700LRP UNI	34
LSTC3W350LRP	22
LSTC7W150LRP	22
LSTC7W200LRP	22
LSTC7W250LRP	22
LSTC7W300LRP	22
LSTC7W350LRP	22
LSTC7W500LRP	22
LSTC7W630LRP	22
LSTC7W700LRP	22
LTC40W1000CALR-1C UNI	26
LTC40W1400CALR-1C UNI	26
LTC60W1100CALR-1C UNI	26
LTC60W1500CALR-1C UNI	26

Model	Page
LTDC25W700NZ-T2CH	16
LTDC45W1050NZ-T2CH	16
LTDC50W1500NLRP UNI	15
LTWC40W1050NLR	27
LWC40W1000CALR	10
LWC40W1050CALR	10
LWCBC25W600NLR	9
LWCBC40W1050NLR	9
LWDC25W600NLR	10
LWDC25W700NLR-T2CH	10
LWDC36W1000NLR-T2CH	10
LWDC40W1050NLR	10
LWTC20W500CALR	10
LWTC32W800CALR	10
SANF-G	30
WBDB	28
WBDD	28
WBSB	28
WBSD	28
WZDB	28
WZSB	28
LLDC12W700CALR-Z	18

Technical specifications sheets for download: www.hepgmbh.de

All rights reserved | HEP GmbH 2023



HEP GMBH

RAMSLOH 10

58579 SCHALKSMÜHLE

+49 (0) 2355 50919 0

INFO@HEPGMBH.DE